


Flush-mounted three-way switch Onyx, 10A, 250V, WP-5O, black

ORNO

Marka: Orno | Symbol: OR-OE-7502/B | Ean: 5904988910328

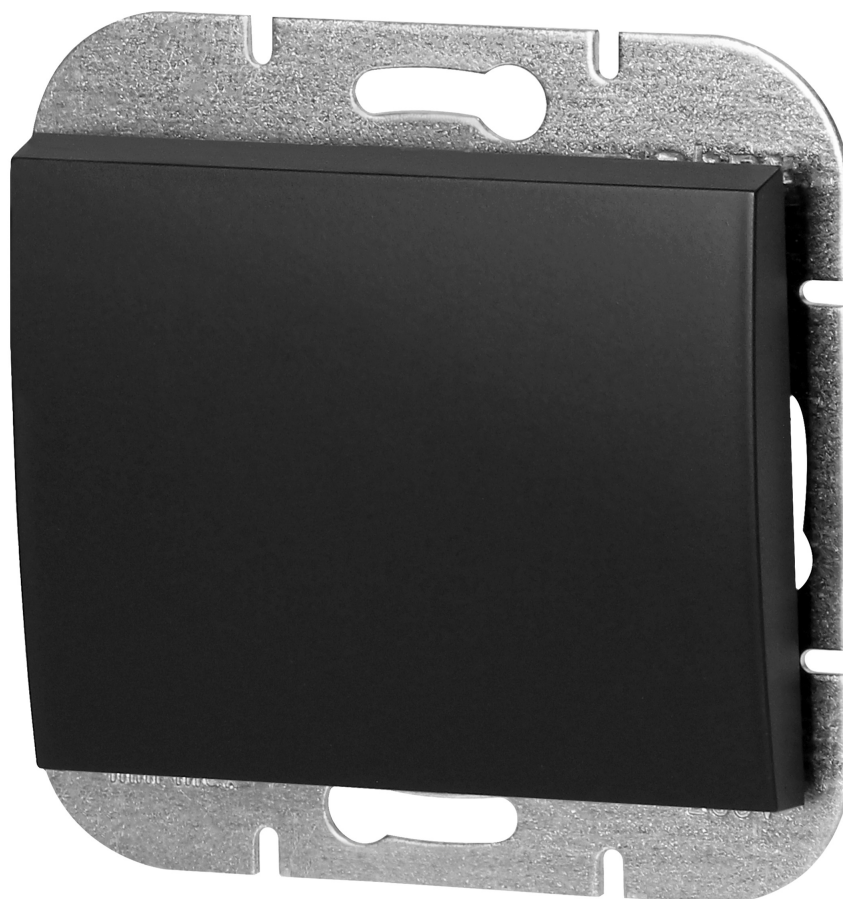

PRODUCT DESCRIPTION

Modular series with a frame plate system. A series of modern switches and sockets harmoniously blending with original designer interiors. The switches' modern quick-connect mechanism (wires are connected by pushing them directly into the body) provides secure and safe wire installation and removal. The sockets are equipped with traditional screw connections. The internal design of the terminals guarantees secure connection of wires from 0.75 mm² to 2.5 mm². Strong and robust mounting plate grid and special mounting elements enable stable and secure installation in the box.

The three-way switch is adapted to flush mounting. Product is used to switch on and off the circuit to which the stair lighting is connected. This type of switches are always installed in pairs. The function of this type of switch is to activate, for example, lighting from different locations or floors. Similarly, the lighting in the bedroom, which you turn on when you enter the room and want to turn off right next to the bed, can be realized without going back to the main switch. It should be used indoors (IP20).

The product is available in two colors: white and black. Dimensions 82x98x41mm.

TECHNICAL DATA

General information:

Wiring system:	Łącznik schodowy
Method of operation:	Przycisk wahadłowy
Assembly arrangement:	Element systemu modułowego do osprzętu elektroinstalacyjnego
Number of rockers:	1
Mounting method:	Montaż podtynkowy
Type of fastening:	Montaż pazurkowy /-śrubowy
Material:	Tworzywo sztuczne
Material quality:	Tworzywo termoplastyczne
Surface protection:	Malowanie
Surface finishing:	Matowy
Colour:	Czarny
Label space/information surface:	Nie
Suitable for degree of protection (IP):	IP20
Nominal voltage [V]:	250
Frequency [Hz]:	50
Rated current [A]:	10
Connection type:	Wtyk samozaciskowy
Device width [mm]:	98
Device height [mm]:	82

Device depth [mm]:	13
Built-in depth [mm]:	27
Min. depth of built-in installation box [mm]:	27



