LED strip 12V, 2835, 60L/m, 430lm/m, 4,8W/m, IP63, 6000K, 5m

Marka: **ADVITI** | Symbol: **AD-TL-6487L6** | Ean: **5908254841910**

PRODUCT DESCRIPTION

LED lighting strip is a product with a wide range of applications. You may stick it to the desired surface or you may use LED profiles (recessed, surface-mounted, angled). Thanks to small size (it is only 8 mm wide) it is easy to install on the walls, furniture, near the mirror or even in the places where there is no traditional light e. g. wardrobe niches.

The band is equipped with 60 cool 6000K LED diodes per meter. Application of the LED strip is economical

ORNO GROUP Sp. z o. o. All rights reserved.

and, on the other hand, efficient in terms of the amount of light generated. The usage is completely safe due to 12V DC supply voltage.

The IP63 LED strip will work in rooms of increased humidity, such as kitchen or bathroom. It is 5 m long and may be cut every 5 cm in order to customize it to individual needs.

Connection to the relevant TUYA controller enables remote lighting control with the help of mobile application or voice assistant.

Controllers and other fixing accessories are available in our offer.

TECHNICAL DATA

General information:

Lamp voltage [V]:	12
Lamp type:	LED, niewymienne
Lamp power per meter [W]:	4.8
Luminous flux per meter [lm]:	430
Model:	Taśma
Degree of protection (IP):	IP63
PCB:	Podwójne 8mm
Chip type:	SMD 2835
Energy efficiency class of the built-in lamp:	G
Max. system power [W]:	24
:	4.8
Rated life time L70/B50 at 25 °C [h]:	20000
Cycle on/off:	20000
Colour temperature [K]:	6000
Colour of light:	Zimna biel
Colour rendering index CRI:	80-89
Beam angle (°):	120
Number of nodes per meter:	60

ORNO GROUP Sp. z o. o. All rights reserved.

Suitable for dimmer:	tak
Cut every ... [cm]:	5
Width [mm]:	8
Height/depth [mm]:	2
Length [mm]:	5000
Voltage type:	DC
Type of control gear:	Sterownik LED sterowany napięciowo
Exchangeable control gear:	tak
Self-adhesive:	tak

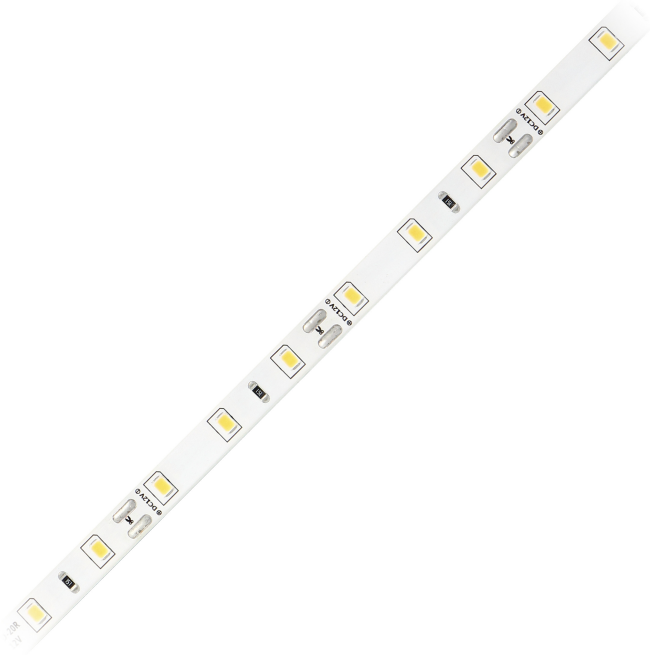

ORNO GROUP Sp. z o. o. All rights reserved.